

20 YEARS OF EVOLUTION FOR THE DORIS PERMANENT NETWORK:

FROM ITS INITIAL DEPLOYMENT TO ITS RENOVATION

Hervé FAGARD¹

¹ Institut Géographique National, Service de Géodésie et Nivellement

94165 Saint-Mandé CEDEX, France.

Fax : + 33 1 43 98 84 50, e-mail : herve.fagard@ign.fr

Abstract

The ground network is one of the major components of the DORIS system. Its deployment, managed by IGN-France, started in 1986 at a sustained pace that allowed it to reach 32 stations upon the launch of the first DORIS-equipped satellite (SPOT-2). The first generation of transmitting antennas, whose installation procedures were adapted to the decimetre performance objective for the DORIS system, was followed by a new model, allowing a more accurate survey. During this second campaign, the antenna layouts gradually evolved towards a better quality, thus improving the long term stability of the reference point. As the positioning accuracy of the DORIS system went on improving, it turned out to be necessary to review the antenna stability for the whole network.

A somewhat subjective stability "effort" was used, as suggested by another rev.

by a major renovation action which started in 2000 and is now almost completed. New installation procedures, aiming at meeting much more stringent stability requirements, were enforced and resulted in a definite improvement of the overall network quality, through the renovation or installation of 43 stations in six years. Now that the renovation is almost

In six years, through the renovation or installation of 43 stations and the implementation of new installation procedures to meet more stringent stability requirements, significant improvement in network quality (maybe performance) was achieved.

✓
complete, a more analytical approach has been taken to assess the potential stability of all DORIS occupations.

Besides deploying the network, IGN is also in charge of its operational maintenance, an intensive activity on account of a significant failure rate of the successive generations of equipment. Nevertheless, thanks to its unique density and homogeneity, DORIS has ~~always~~ maintained a very good coverage rate of the satellites orbits.

Through a large number of well-distributed co-locations with the IGS, SLR and VLBI networks, DORIS contributes significantly to the realisation of the IERS reference frame. Moreover, with many stations located near, and accurately connected to tide gauges, it participates in the monitoring of sea level changes.

Although it has several advantages over similar ones *techniques?* there is still room for improvement ~~for the~~ the DORIS network, towards even better orbit coverage and contribution to the IERS frame.

Keywords: DORIS, tracking network, geodesy, reference frames, co-location

It would be a good idea to start off with a general explanation of how DORIS works, prep etc

1. INTRODUCTION : HISTORICAL BACKGROUND

The realisation of the DORIS system was decided jointly in the early eighties by the French space agency (CNES: Centre National d'Études Spatiales), the French national mapping agency (IGN-F: Institut Géographique National – France) and a research group in the field of space geodesy (GRGS: Groupe de Recherche en Géodésie Spatiale). Because of its experience in the field of the installation of geodetic networks, IGN ^{was responsible for} ~~has taken care of~~ the deployment of the ground network and ^{for} ~~of~~ the determination and publication of the stations coordinates (Willis et al. 2005). For twenty years ^{the past} ~~now~~, the geodetic department of IGN-F (SGN: Service de Géodésie et Nivellement) has ^{kept} ~~been~~ negotiating agreements with host agencies, installing the equipment, surveying the antennas, and ^{through} ~~keeping~~ the DORIS stations in working condition. Since then, ^{el} ~~The~~ DORIS system has evolved ^{into a larger} ~~into a larger~~ international cooperation, leading to the recent establishment of the International DORIS Service (IDS) (Tavernier et al. 2002; 2005).

An essential requirement for the precise computation of the orbits was to ensure an almost constant visibility of at least one ground station by the on-board receiver. On the other hand, to be able to express the orbit in a geocentric terrestrial reference system, the coordinates of a sufficient number of well-distributed stations had to be available in the same system. To meet the orbit coverage requirement for the SPOT-2 satellite (832km altitude), it was estimated that the network should ^{include} ~~be made of~~ approximately 50 stations, as evenly distributed as possible around the globe.

what was the requirement?

see new wording

In this paper we will be relating the genesis of this unique network, and its ^{and} ~~various~~ evolutions over ~~about~~ 20 years. After a general description of the site selection and installation, ^{discuss} ~~we will go in detail~~ the sites and points naming conventions, we will ^{its} ~~go in detail~~ the evolution. For each of the three major eras of ^{we} ~~this~~ evolution, we will describe the equipment used, focusing on the various antenna layouts that may have a significant influence on the long-term ^{requirements} ~~antenna~~ stability, a growing concern as the accuracy of the DORIS data analysis results have been improving over the years. After listing the

No, results. Because the positioning results were more and more accurate, a few cm level antenna instability could no longer be neglected nor accepted.

explain how the network is maintained and give a few statistics on the equipment maintenance. Then we will review the current network status: ^{including} ~~after some general information about~~ its configuration, the host agencies and ^{its} ~~user~~ the information to users, we will ^{and an} ~~address all aspects related with the~~

"including" sounds strange considering the beginning of the sentence. See modified wording.

✓
~~the~~ reference points, ~~the~~ surveying procedures, and the determination of geocentric a priori coordinates. Co-location with other IERS space geodesy techniques ~~on one hand~~ and with tide gauges ~~on the other hand~~, will then be listed. We will finish off by presenting the planned evolution^s of the network, ~~after~~ ^{through} analyzing its

No, we first analyse the strengths and weaknesses, then we present the planned evolution. The 5 other reviewers were fine with "after".

2. THE STEPS OF A DORIS STATION INSTALLATION

2.1 Sites selection criteria.

The initial list of potential DORIS station locations mainly ensued from the need ^{for} geocentric coordinates, the best source of which would be a co-location of the DORIS antenna ^S with the highest accuracy space geodesy techniques available at that time: Very Long Baseline Interferometry (VLBI) and Satellite Laser Ranging (SLR).

When none of these instruments were available, coordination ^{from} GPS positioning, either already determined ~~in the frame of~~ ^{during} by IGN ~~at the same time as~~ the DORIS equipment installation. This was notably the case at many islands ^{locations}

~~primarily selected in order to meet the density and homogeneous distribution criteria for the network, even though no space geodesy measurements had ever been performed at these sites.~~

Sentence was modified, but information was retained

The concern for co-locations between the DORIS stations and tide gauges appeared later, with the growing interest for sea level rise related studies.

2.2 Selection of a host agency.

After a site had been a priori selected, a host agency ^{local} ^{was sought} ^{satisfy} ^{requirements} had to be found, who would agree to host the station and take care of its maintenance, and ^{where} the following needs ^{must} could be met

- The transmitting beacon and its backup power supply ^{needed to} be in a room with moderate temperature and temperature gradient, with mains power supply available.

?
This was clear for all other revs.

No, "at that time" applies to "guyed tower or wall side mount", not to "on a structure"

- The antenna ^{must} ~~had to~~ be installed outside with a clear view above 10 degrees, on a structure that would allow the use of the antenna supports – guyed tower or wall side mount – ~~available at that time~~. ²
- The host agency ~~should agree to carry out some~~ occasional maintenance operations at IGN ^{and return} would include some minor verifications and adjustments, as well as ~~sending out of order~~ equipment for repair. ^{"malfunctioning" was suggested by another rev.}
- It ~~was necessary to check that the~~ frequencies transmitted by DORIS ^{should not} would not be likely to interfere with existing receivers in the area. ^{cannot} When this ~~could not~~ be avoided, the solution generally consists of a temporary interruption of the DORIS transmissions, either manual or automatic. ^{may suffice.} The receiving systems that are likely to be affected by the DORIS signal are:
 - ~~The~~ VLIB antennas: such interference ^{if it exists, may} can be avoided by having a physical signal obstruction between both antennas. [Nevertheless there is one case (Kauai) where both antennas are inter-visible and no interference have been noted, so this issue deserves further investigation.]
 - Upper air soundings carried out by most meteorological stations. ^{why is this important?} Only some models of Vaisala receivers are likely to be affected, ~~and such interference occurs only~~ if the DORIS antenna and the radiosonde antenna are very close to each other (less than 30 m or so).
 - The 2 GHz antennas used by the Ariane tracking stations at Kourou, Ascension and Libreville.

In order to check that the prospective host agency would meet the above requirements, a questionnaire was sent ^{with key questions on a request for} which ~~generally resulted in yes/no answers to a few questions, and a~~ ^{The questionnaire have evolved} layout. This ~~has been progressively evolving~~ throughout the network's deployment, with a deeper and deeper preliminary survey being conducted as the requirements for antenna stability ^{have become} ~~became~~ more stringent (see chapter

No, this happened later. Info about the chronology of events was added.

^{move up to list} In most cases, ~~IGN negotiated agreements with the host agencies~~ Then it was necessary to obtain the prospective host agency's agreement to host and maintain the DORIS station, which was in most cases materialised by a written agreement signed with IGN. Frequency clearance had also to be granted, which was generally handled by the host agency through an application with the relevant national radio communications authorities. ^{some} This negotiation ~~was~~ generally took several months, but some projects ^{occasionally} especially in the recent years, after all the "easy" ones ~~had been achieved in the first years~~ took up to two or three years in succeeding. ^{several reviewers, several wordings ;-)}

2.3 Installation stage.

Not surprising: there is not much to say, and such a difference renders well the actual sequence of events: dispatch, installation and survey were a breeze compared with the negotiation stage and its associated administrative hassle.

- Training of the staff who would take care of the maintenance.
- Geodetic survey of the antenna's reference point, resulting in the connection to another space geodesy technique, or to the local geodetic network.

3. IDENTIFICATION OF THE DORIS SITE AND POINTS

Each DORIS site (i.e. a location hosting a DORIS station, where several successive DORIS points may have been present) is identified by its name. This name can be:

1. The name of the "space geodesy site", especially in the early some cases was very large (up to 30 km). For example, the site N'Kohang, 40 km away from Libreville.

2. The name of the city where the station is located, or the name of a nearby major city, or an

3. The name of the island where the station is located.

In a few cases, the chosen site name turned out later not to be a very wise one. For example, "Galapagos" is the name of an archipelago made ten or so islands, extending over 30 Cruz, i.e. the name of the island) was chosen when a new station confusion with the first station installed at San Cristobal Island, inaccurately named "Galapagos".

Each DORIS point (i.e. each location of a DORIS station)

- A DORIS number (e.g. 102025003 for the current station).
- A four character ID or acronym, used in the data files.

Here is the explanation about the difference between "site" and "point", that was requested in section 1.

- The first three characters are derived from the site name (e.g. La Réunion → REU, Cibinong → CIB, Ponta Delgada → PDL, etc.).
- The last character identifies the antenna model: A for an Alcatel antenna, B for a Starec antenna (see chapters 5.1 and 6.1)

One all "A's"
alcatel?

When an antenna is changed from Alcatel to Starec within a DORIS site, the fourth character change – from A to B – is sufficient to distinguish between the two DORIS points. If an antenna is moved within a given DORIS without the antenna model being changed, the third character of the acronym is incremented by one le alphabetically to differentiate the new point. For example:

Yes, this is clearly stated

- The very first station at Reykjavik, equipped with an Alcatel antenna, was "REYA".
- After the Alcatel antenna was replaced with a Starec on the same tower, it was "REYB".
- Then in 2004 the Starec antenna was moved and identified as "REZB".

There have been a few exceptions to these rules:

- KOK were the first three letters for the acronym of the station "Kaunui", from the name of the geodetic site and geographic entity "Koke'e Park". ~~Moreover~~ When the first DORIS antenna at this site (KOKA) was replaced with a Starec antenna, it was named KOLB rather than KOKB in order to avoid confusion with the similarly named IGS station.
- SPI derives from the initial site name "Spitzberg" (a 39000 km² island) which was later changed to the more accurate site name "Ny-Ålesund".
- The acronym evolution at "Santiago" was SANA → SAOB → SANB (instead of first SANB, then SAOB).

The rule was bent twice, hence the use of "moreover".

Other numbering systems are used internally by CNES, notably for the programming of the on-board instruments.

A summary of all DORIS antenna acronyms with start and end date for each occupation is provided in the Electronic Supplementary Material of this paper (file "DORIS-occupations.pdf").

web site?

4. SUMMARY OF THE NETWORK'S EVOL

Might be considered after publication. But this file must be in the ESM (this is why ESMs are made for), as one of the reviewers found it "a very useful table"

✓
The ~~was~~ first DORIS station was Tristan da Cunha (~~etc~~ TRIA), which was installed by the Proudman Oceanographic Laboratory in June 1986. Then ~~installation followed installation at a sustained pace, with about~~ *10 new stations a year (figure 1) during the first two years, allowing the network to be operational when the first DORIS-equipped receiver (SPO* *see new wording (compromise between several revs.)*

ten
up the network on the official start of the DORIS system operation (end of January 1990), with visibility circles corresponding to the 12° cut-off angle used at that time in the CNES pre-processing of the data. Then the deployment went ~~on~~ at a steady pace of about 5 new stations per year until the end of 1992. This date also marked approxim *"to go on" = "to continue", which is what I meant* it with in chapter 5.

As of 1993, the network deployment went on at a slower pace. The number of stations reached 49, roughly the initial objective of 50 stations, by the end of 1993. A few new stations were added, and a few existing ones had to be moved to new locations either following the closure of host agencies facilities, or to *provide* ~~improve their~~ co-location with other geodesy techniques. All these new stations were equipped with second generation antennas, and a few with second generation beacons.

In *program*
~~After~~ 2000, a general renovation was initiated, ~~in order~~ to improve the overall stability of the antennas reference point. Many stations were completely renovated or moved to a new location. A few new stations were installed, all meeting the new, more stringent requirements *stability* ~~was~~. The deployment of the third generation beacons started in 2002.

5. THE DEPLOYMENT OF THE EARLY NETWORK: THE ALCATEL ERA

5.1 Description of the equipment

The first version of the equipment that made up a DORIS station consisted of :

- The beacon, version 1.0, manufactured by CEIS, France. This element (Figure 3), weighing 24 kg and designed to be integrated into a standard 19 inches rack, had to be installed inside a building with moderate temperature gradient. It could be programmed through an integrated man-machine interface consisting of a

✓
keyboard and a LCD screen. The beacon generates the DORIS signals: 401.25 MHz (6 W) and 2036.25 MHz (12 W).

- A box containing three 12V batteries, providing backup power to the beacon during power outages lasting up to 72 hours.
- A dual frequency and omni-directional antenna (figure 4), manufactured by Alcatel. This antenna was bolted on an interface (consisting of a square horizontal plate welded to a vertical tube), which could be mounted on a variety of supports, in most cases a small lattice tower.
- A weather station (figure 4) measuring temperature, pressure and humidity. These parameters are transmitted through the 400 MHz modulated signal and can be used to correct for atmospheric propagation delays.

5.2 Alcatel antenna layouts

In order to be able to adapt to the various site layouts likely to be encountered, and for lack of detailed information allowing to determine beforehand ^{on} exactly where and how the antenna and beacon would be installed, a standard set of antenna supporting devices was sent ^{out for each deployment.} This included several one-metre lattice tower sections, guy wires and a wall side ^{see new sentence, taking into account another rev's comments} for the beacon and batteries. The IGN technician who carried out the installation had to manage to find suitable locations for both the beacon and antenna, compatible with what was generally the most restrictive limitation of the DORIS equipment set: the very short ^{and} 10 m cable length between the beacon and the antenna. In order to meet the good visibility requirement ^{despite} this limitation, many antennas had to be installed on building roofs or on top of two or three metre high ^(towers) if not higher.

The most frequently used antenna support was a triangular, 17 cm sided, galvanised steel lattice tower made of two or three one-metre sections, bolted together and set up on one of the following structures. ^{either}

- ^{1 sentence}
- a concrete pad on the ground, already available (figure 5),
 - a concrete block specially built for the DORIS installation (figure 6), or
 - a building's top terrace, (figure 7)
- ^{on the top of a building}

At a few sites where the antenna was installed on a roof, a clear sky view allowed to use only one tower section. *was required*
Conversely, four sections had to be used at a couple of locations in order to avoid nearby signal obstructions.

Compromise between various remarks from other revs.

Tower
When ~~such~~ layouts were used, the tower itself was mounted on a square base plate, which was bolted to the concrete support using four expansion bolts. This base plate had a small vertical tube in its centre, which *obstructed* prevented to see the ground mark if one had been set under the plate. In some cases the tube itself was used as the control mark *instead*. Such a control mark was destined to be used in the future to check the antenna stability *on one hand*, and as a marker of the antenna location in case of *movement* or accidental *destruction* of the antenna *on the other hand*.

1 sentence
Other designs have been used more rarely:

- Direct mount of the antenna interface on a roof, without using a tower (Figure 8)
- Propped steel pole (Figure 9)
- Tower mounted on the side of a wall (Figure 10)

In a few of these cases, no ground mark was present.

supported with
Most towers were *propped* using stainless steel cable wires and turnbuckles, allowing a pretty strong and stable fastening of the tower. *did* Nevertheless, at a few sites the cable wires were very long, or somewhat loose, or even nonexistent, which would not guarantee a centimetre-level stability of the antenna. *since* This was *requirement* acceptable considering the expected positioning accuracy of the DORIS system.

no, "accuracy" (see section 1)

By adjusting the tension of the stays, it was possible to centre the antenna base (i.e. reference point) above the ground mark when present. However, none of the above antenna support designs allowed to precisely adjust the antenna vertically, i.e. to guarantee that the electrical phase centres *at* and notably the 2 GHz one *vertical ment of* on which the positioning measurements are performed *where*.

Modified following another rev's suggestion

significant
centimetre-level error could be ignored during the early years of the DORIS positioning, but it was taken into account when Alcatel antennas were surveyed prior to removal, during the network's renovation phase. It is now *when* far from being negligible taking into account the recent geodetic results obtained by the DORIS system (Willis et al. 2005).

what accuracy?

6. THE NETWORK DENSIFICATION: THE STAREC ERA

on design?
No, model

A new antenna model has been used as of mid-1992, ~~instead of~~ *replacing* the original Alcatel design, whose deployment ended in September 1992 with the installation of the two Australian stations at Canberra-Orroral and Yaragadee. The number of stations in the network ~~kept on increasing until the end of~~ *ed through* 1993, when it stabilised around 50 stations, before increasing again slightly at the end of the 90's. During this period (1994 to 1995), several stations were moved to new locations, and a few had to be upgraded ~~either following beacon failures~~ *in* to antennas by strong storms. A second generation beacon was installed at a few sites ~~as of~~ *on* late 1995 (first one at Krasnoyarsk), but was never deployed ~~at~~ *on* a large scale: a maximum of 14 units have been operating simultaneously in the network (in 2003).

No, not only in 95 but over several years

what does this mean?

see new wording

not insignificant

OK, changed to "_very_ large scale"

6.1 Description of the second generation equipment

The new antenna model (Figure 11), manufactured by Starec, France, offered several improvements with respect to the original Alcatel model:

- ~~Thanks to its slimmer design, it catches the wind far less, being therefore less prone to damage by storms,~~ *making it less susceptible to wind damage*
- ~~its phase centre location is better defined (1 cm),~~ *better defined*
- ~~its slimmer and more rigid design allows a more precise survey and centring to be carried out.~~ *for*

changed according to other revs' suggestions

From its very first deployment, this antenna model was mounted on a triangular plate machined at IGN's mechanical workshop, linked to the underneath support by screws and nuts that allow a very fine adjustment of the antenna verticality. Three different materials have been used for this triangular plate: anodised aluminium, marine aluminium, and stainless steel. Unfortunately no ~~any~~ record of the material used at each DORIS station was kept until the end of the 90's, and we discovered after the event that corrosion had affected a few anodised aluminium plates, ~~and~~ causing a significant antenna tilt.

The new beacon (Figure 12), called "2.0 DORIS beacon", manufactured by SOREP, France, had the following differences with respect to the original 1.0 beacon:

- Much lighter (8 kg) and compact,

- Waterproof casing allowing its deployment in more humid environments,
- External power supply (the internal one on the first generation beacons has been the cause of most failures), in the form of a charger and two batteries in a dedicated waterproof box,
- Lower power consumption (30 W vs. 120 W for the 1.0 model) allowing ~~to~~ ^{at} install ~~in~~ ^{at} locations where electrical power ~~supply~~ is limited,
- User interface ~~only~~ through an external computer. The beacon itself has no indication of its current ??

One (more) table would not be very useful, as the most significant differences between various models are not weight or size, but a difference in operation and functionalities that is better dealt with in sentences than in a table

During this renovation
Another apparently minor evolution equi

No, the "renovation" is dealt with later.
This change also applies to new stations.

increasing from 10 to 15 m — had a significant influence in terms of antenna layout, as it allowed more freedom in the selection of the antenna location. 20 m cables have ~~not~~ been used at a couple of locations but, because of the higher signal attenuation they cause, ~~they~~ use should be as limited as possible.

On the other hand, ^{ing} a modified version of the first generation beacon, consisted of a 1.0 beacon without the failure-prone internal power supply unit, connected to the power supply box of a second generation beacon. ^{from the} ~~Very~~ few such uni ^{has been} ~~allowed~~ to keep several stations operating at a time when the number of second generation beacons was not sufficient to replace the aging first generation ones.

Why in full here and keep "10 to 15 m" above?

see new wording

6.2 Starec antenna layouts

The antenna supports used during the 1993-1999 period were more or less standardised: most Starec antennas were installed, ^{using} ~~at~~ the triangular plate, on a 2 metre high, 17 cm sided steel lattice tower, fastened with stainless steel guy-wires and turnbuckles (Figure 13). The base of the tower was bolted directly into the concrete support with three expansion or chemical anchors. A ground mark was always embedded in the concrete support, and would from then on be usable since the base square plate dealt with in chapter 5.2 was no longer used. Using

both the antenna triangular supporting plate adjustment nuts, and the turnbuckles, the antenna's verticality and centring above the ground mark was carefully adjusted within one millimetre.

The exceptions to this standard layout were:

- The Alcatel antennas that had to be moved (e.g. following host agency premises closures) were generally relocated exactly as they initially were, using the same support. Several such relocations were carried out by the host agency with no intervention by IGN-F.
- 3 metre high tower (Cibinong/CIBB, Rio Grande/RIOB (Figure 14), Rapa/RAQB, Socorro/SODB, La Réunion/REUB) or even higher (6 m at Syowa/SYOB) when imposed by nearby signal obstructions.
- 1 metre (or less) high tower: with guy-wires at Santa Maria/SAMB and Krasnoyarsk/KRAB, no guy-wires at Everest/EVEB, Ottawa/OTTB, Papeete/PAPB (later moved to PAQB), Libreville/LIBB and Fairbanks/FAIB. The half-metre tower without guy-wires turned out to be very easy to install on top of a building's wall while offering a very good rigidity, and was therefore retained during the renovation of the network dealt with in chapter 7.
- Direct installation of the antenna triangular supporting plate on a concrete pillar, using three short threaded rods embedded into the concrete. This very stable design was first used in February 1997 at Ascension/ASDB (figure 15), then at Amsterdam/AMSB, Syowa/SYPB and St John's/STJB.
- A very rigid 3 metre steel pole was used at Mount Stromlo/MSOB.

7. THE RENOVATION ERA

The need for an improvement of the DORIS antennas stability emerged in the mid-90's, after the increasing positioning accuracy of the DORIS system allowed it to be accepted as a new technique for the realisation of the IERS Terrestrial Reference System (Boucher et al. 1994; 1996). When an existing station had to be moved, or when a new one was installed, increasing attention was paid to install the antenna on a very stable support (Fagard and Orsoni 1998). Such a policy has been applied until **compromise between revs.** motivated only by the need for antenna stability improvement during this period. Guy-wires were still used to fasten antenna supporting towers, although they were installed with more care than in the early years of the DORIS network (3 guy-wires at 120 degree spacing, identical lengths, stainless steel hardware).

✓

At the end of 1999 a global renovation ^{project to} ~~action~~, aiming at improving ^e the stability of the antennas, was decided.

This ~~renovation~~ ^{initiated} project was presented to the DORIS community during the "DORIS days" in May 2000 (Fagard and Orsoni 2000), and ~~actually started~~ with the renovation of the Djibouti station in July 2000.

7.1 Network preliminary review

In order to plan this renovation action, it was first necessary to review the situation at all DORIS sites, in order to determine if a stability improvement was necessary, and how urgent it was. Such an evaluation took the following parameters into account:

- The type of antenna (Alcatel or Starcc). Although no antenna can be considered more stable per se, the Alcatel antenna has several characteristics – higher sensitivity to the wind, much heavier, less accurate survey, no verticality adjustment – that allows to consider it as less stable a priori. *already mentioned.*
- The kind of antenna support (metal tower with or without guy-wires, concrete pillar, other designs).
- The nature of the structure on which this support was installed (building, rock, concrete block, etc.).
- The date of the installation, as recent installations could reasonably be considered of better quality.

This resulted in a one to three star stability grade given to each antenna (Fagard and Orsoni 2000). This evaluation was later refined for internal use by IGN-F, into four categories defined in table 1.

These apparently objective evaluation criteria were modulated by a subjective feeling on the antenna support overall quality. The resulting stability estimate for the whole network is shown on Figure 16.

It is important to note that the purpose of such an estimation was only to allow us to properly manage the network renovation and monitor its progress. The resulting estimate should neither be regarded as an indicator of the quality of the stations computed coordinates and velocities, nor be used to classify them, since the actual stability of an antenna can only be properly assessed by surveying it at different epochs with respect to a stable reference mark. A more refined stability assessment will be presented in chapter 10.4.

Moreover, this was a theoretical approach, and the actual behaviour of the antennas did in some cases differ significantly from our expectations, for better or for worse:

- Corrosion of the antenna triangular base plate (the anodised aluminium type) caused a several centimetre antenna tilt on a concrete pillar, for an "excellent"-rated antenna support (Figure 17: Amsterdam/AMSB).
- The antenna centring turned out to be still within a few mm after more than ten years for several Alcatel antennas installed during the very early years of the DORIS network, hence rated "poor".

7.2 Quality requirements and monumentation designs

7.2.1 Requirements

In order to be compatible with the expected, and almost achieved accuracy of the DORIS positioning system at the centimetre-level, the objective in terms of stability of the DORIS antenna reference point was defined as one centimetre over ten years. Such a requirement had the following consequences on the design of the antenna supports that would be used for all future installations and for stations renovations:

- Guy-wires should no longer be used to fasten a supporting tower and adjust the antenna centring. Although such a design turned out to be very stable over many years, it is not 100% reliable, as accidental damage, or progressive slackening of one stay would result on an antenna horizontal shift, either sudden^{ly} or progressive^{ly} that may go unnoticed locally for quite a while.
- Only the antenna supports described below should be used.

adjectives that qualify the noun "shift"

7.2.2 Design 1: concrete pillar

The preferred antenna support is a concrete pillar (figures 18 and 19), built according to "geodetic" specification, ^{which} ~~we~~ take into account the nature of the ground. The pillar designs shown on figures 20, 21 and 22 have been derived from those used by the Canadian Geodetic Survey Division (Geodetic Survey Division, 1993). A triangular plate is set on three A4 stainless steel rods embedded in the concrete pillar, and a series of nuts ^{position} allowing to adjust the antenna vertically. The triangle is made of either high quality stainless steel (AISI 316

"vertical position" may let the reader think that the antenna height can be adjusted

✓
be smaller than two metres in order to limit the antenna movements caused by the difference in thermal expansion between both sides of the pillar.

This is related with the horizontal movements which are mentionned. A homogeneous expansion would have less influence on the antenna ref pt position.

7.2.3 Design 2: self-supporting metal tower

The second preferred support is a very rigid lattice tower (self-supporting type, not requiring guy-wires). Such a tower is installed on a very stable concrete structure at ground level. This concrete base is built according to the same specifications as the concrete pillar described above. In a few cases, existing concrete structures were used if they were in good condition and their dimensions seemed to guarantee a good long term stability.

see general remark below about "too much detail"

This tower design is used when surrounding signal obstructions (often caused by the very building that hosts the DORIS beacon) requires that the antenna be higher on the ground than what a concrete pillar allows. It is also used when a good quality concrete base is already available, allowing an easier and cheaper installation than specially building a concrete pillar.

Finding strong enough lattice towers, available in one-metre sections (that fit easily even in the small airplanes that service some very remote DORIS locations) was not a easy quest. After trying a first model (installed at Santiago/SANB and Easter Island/EASB) whose finish left to be desired, 32 cm sided, galvanised steel towers manufactured by Leclerc SA, France, have been used at many DORIS stations and turned out to be satisfactory (figure 23). This tower model has an additional advantage: it can also support the third generation meteorological station after its standard installation set was slightly modified by IGN (figure 24).

7.2.4 Design 3: antenna on a building

At a few DORIS stations, even putting the antenna on a two metre tower, set on a concrete block protruding 30 cm or so off the ground – which puts the lowest phase centre almost three metres above the ground – is not sufficient to give enough clearance because of high nearby signal obstructions. In such cases, the only option is to put the antenna on a building, generally the one where the indoor DORIS equipment is located. Such a layout can give satisfactory results stability wise, provided the following precautions are taken.

this could be said in 1-2 sentences

- The location where the antenna support is installed should be carefully selected with respect to the structure of the building (figure 25), in order to achieve as good as possible a long term stability. Ideally, the antenna support should be installed on top of a load-bearing pillar, or at the corner of two load-bearing walls. If such a solution is not achievable, the best approaching one is sought (e.g. not putting the antenna on the centre of a load-bearing wall). If necessary, the construction used,

Yes it might, but I found it useful to detail all the precautions that we take

- The antenna support is as small as possible. Putting the antenna on top of a building allows to save a few metres and hence to sometimes get rid of most signal obstructions, therefore the antenna can be put on a very short tower. Using only one section of a 32 cm sided tower (figure 24), or a half-metre 17 cm sided one (figure 26) – which has the additional advantage of fitting on narrow concrete beams – guarantees an optimal rigidity of the support.
- When possible, the tower should be bolted or embedded directly in the underneath load-bearing structure. This requires special precautions when a waterproof coating covers the roof.

7.3 The third generation beacons

A new generation of beacons was introduced, and deployed as the renovation was progressing (Tavemier et al. 2003). The first “standard” third generation beacon – i.e. apart from the master beacon at Toulouse – was installed at Tristan da Cunha in January 2002. Their development was stopped for a while as of February 2004 after a serial failure on the 2 GHz channel had been discovered, and resumed in July 2004 with retrofitted units.

This new set of equipment (figure 27) is composed of:

- The beacon, version 3.0, manufactured by SMP, France. Its appearance is very similar to the first generation one, with a bigger LCD screen and a more sophisticated man-machine interface. It should be installed inside a building and fits in a standard 19 inches rack. The power consumption is approximately the same as the first generation one (130 W). Contrary to the previous models, the signal is modulated on both channel. It

perhaps this goes in a Manual?

also has a new "Restart" operating mode allowing its signal to be received even if the time is not properly set.

- A charger that supplies power to the beacon and monitors the charge of the backup battery.
- Three different configurations (30 Ah, 110 Ah and 220 Ah) for the 12V battery.
- The weather station (Figure 24) is a Vaisala PTU200 unit.
- The antenna (Starcc model) is unchanged.

7.4 The progress of the renovation

As can be seen on figure 28, there has been a steady and definite improvement of the network quality stability-wise between 2000 and 2005. During this six year period the following evolutions have been taking place:

- 31 existing stations were renovated (at least 3 per year, and up to 10 in one year).
- 4 stations were added to the network.
- 8 new stations were installed as a replacement for existing ones which have been closed.
- 2 stations have been removed and not yet replaced (Arlit and Guam).

Repeated

No, this is the only place where such a summary is given

The renovation turned out to be much longer and complicated a process than we first expected. The more stringent requirements for the antenna stability required to gather a lot of information about the site (pictures, sketches, obstruction diagrams if available). Even though a contact with the host agency had been established for many years, sometimes long time to answer and the need to plan logistical aspects in detail – especially when a concrete monument had to be built – involved that the whole process could take well more than one year, and require that well more than 100 e-mail messages be exchanged between IGN and the host agency. This is even more true for the installation of a new site ex-nihilo, with a couple of projects extending over up to three years before being eventually carried to a successful conclusion.

8. THE IDS NETWORK AUGMENTATIONS

✓

In the frame of the establishment of the IDS (Tavernier et al. 2005; submitted), various groups have made proposals to host additional DORIS stations not included in the permanent DORIS network, with varied scientific objectives and for varied durations.

The following experiments have been carried out to date (figure 29):

- An ice sheet monitoring experiment was conducted by Geosciences Australia on the Sorsdal glacier, Antarctica, by operating a DORIS station for about three months twice, during the austral summers 2002-2003 and 2003-2004.
- Following a proposal of the German BKG to operate DORIS stations at Wettzell (Germany) and within the Transportable Integrated Geodetic Observatory (TIGO) located at Concepción, Chile, a DORIS station was installed in May 2003 at Wettzell. It was removed in January 2004 after producing little data, due to interference to the VLBI on one hand, and an equipment failure on the other hand.
- A DORIS station was installed on the Gavdos island, South of Crete, in September 2003, as part of an altimeter calibration site (Pavlis et al. 2004). It has been inactive for an extended period of time because of a beacon failure followed by a shortage of spare beacons, but a retrofitted third generation is on its way at the time of writing and should be installed in February 2006.
- A station was installed at the Antarctic Argentine base "Belgrano II" in January 2004, following a joint proposal by the IAA (Instituto Antártico Argentino) and the German AWI (Alfred Wegener Institute). Because of a failure of the second generation beacon shortly after its installation, it has been providing little data during the first year of operation, but it has worked very smoothly after a third generation beacon was installed one year later. Considering its excellent results and significant contribution to the network coverage and robustness in the Antarctic region, the "DORIS Mission Group" – consisting of representatives of CNES and IGN – decided in December 2005 to change its status from "IDS experiment" to "Permanent DORIS station".

top much detail

This is the only place in the paper where the IDS experiments are addressed.
I suspect that the proposing groups would no be very happy to see them only briefly mentioned

9. THE NETWORK MAINTENANCE

9.1 Maintenance running

In addition to the deployment of the network, IGN-F has also been in charge of its maintenance, the operation of which can be summarised as follows (figure 30):

- An anomaly is detected by the DORIS control centre, either in the form of a complete lack of measurements, or of a wrong parameter (time set, frequency, meteorological parameters, power cut, etc.);
- The DORIS control centre sends – for each anomaly detected – an intervention request to IGN's maintenance unit (SIMB; Service d'Installation et de Maintenance des Balises = beacons installation and maintenance service);
- IGN/SIMB contacts the host agency, asking it to carry out the necessary operation;
- The host agency performs the requested operation, and reports to IGN/SIMB, which then reports back to the DORIS control centre.

9.2 Maintenance statistics

Equipment reliability has been a major issue throughout the life of the DORIS network. The proportion of emitting beacons in the network averages to about 85 %, with lows at 80 % and highs reaching 95 %. Because of very long repairing delays and frequent shortages of spare units, a few stations have remained down for several months before they could be replaced. This rate nevertheless allows the global coverage rate – ratio of time during which the on-board instrument receives a signal – to remain at a good level, thanks to the density and homogeneity of the network. This coverage rate, whose maximum theoretical value is 93% for high altitude satellites like TOPEX-Poseidon and Jason-1 (both at 1330 km altitude), is still 80 % when 20 % of the stations are down.

Sorry, but one other revs has asked that information be added here

Each generation of beacons has had its own share of specific problems:

- The first generation beacons main source of problems was the internal power supply (70 % of the failures). Other failures were due to the oscillator or to the synthesizer.
- An amplifier problem on the second generation beacons caused a few month interruption in their deployment around 1996. Apart from this temporary anomaly, which was corrected as of 1997, this model did not turn out to be more reliable than the first generation. In 2005 a new problem (power supply defect

*there should be summary of each rev
successes*

creating spurious in the signal) was detected, which will require the replacement of the remaining units by third generation beacons.

- Almost all third generation beacons installed between early 2003 and August 2004 have been affected by a failure on the 2 GHz channel, which required these units to be retrofitted. After this problem was solved, the deployment of this model has resumed, either on the occasion of a major site renovation or by simply shipping a new model to the host agency who took care of its installation. From then on, the operating rate for this model has increased to 90 %.

Because of the shipment waiting period, customs formalities and scarce service to some remote DORIS locations, the necessary time to have a spare beacon delivered on site can vary tremendously, from a couple of weeks to as long as one year.

From the start of the DORIS system operation, IGN's maintenance unit has been handling about 150 intervention requests and 12 beacon exchanges a year on average.

The following types of operations are likely to be requested to the host agency :

- Time or frequency adjustment: 78 %,
- Reset of the beacon after a failure (automatic for the third generation beacons): 4 %,
- Checking through a self-test procedure: 8 %,
- Battery charging or replacement: 2 %,
- Replacement of the weather sensors: 2 %,
- Exchange of the beacon by a spare sent by IGN: 6 %. No on-site repairs are carried out by the host agency.

On the other hand, planned interruptions of the emissions to avoid interference to other receiving systems occur at the following sites:

- Yellowknife and Syowa: during (infrequent) VLBI campaigns,
- Ascension and Libreville: during the tracking of the Ariane rocket upon each launch from Kourou,
- Mahe and Rapa: during the meteorological radiosoundings, once or twice a day.

10. THE CURRENT NETWORK STATUS

10.1 The current network configuration

In February 2006, the distribution of the different equipment types in the permanent network (56 stations) is :

General answer about "too much detail".

I agree that the paper is much longer and verbose than those usually found in the JoG. But please note that:

1. This will be a "special" paper in a "special issue" of the Journal. It is obviously not a scientific paper, but is intended to be a support paper for other ones in the same issue, by describing in detail one of the system's components. Some readers will find it too long, but they may pick out whatever sections they are interested in.

2. One of the other revs commented: "Although the paper is somewhat lengthy, none of the information seems to be superfluous".

Therefore I have tried to somewhat compact a few sections according to other revs' suggestions, removed a couple of pictures, but will maintain most of the information.

The host agencies who kindly host and maintain the 56 stations that make up the DORIS network can be divided into the following categories:

- National survey agencies: 10 stations,
- National space agencies: 12 stations,
- Scientific institutes (mainly dealing with Earth sciences): 19 stations,
- Polar institutes: 8 stations,
- Meteorological stations: 6 stations,
- Other (a telecommunication station): 1 station.

There are in total 43 distinct host agencies (some of them host several DORIS stations at different locations), representing 32 different nations.

This is interesting, but not fit for Journal.

✓

The first approach will be described here in details. It has consisted in assessing all elements in the antenna support (i.e., from top to bottom, all items between the antenna and the ground) that may contribute to some extent to the antenna instability. The more elements between the antenna and the ground, the higher the risk of experiencing an antenna reference point and/or phase centre displacement in the long term. Each potential source of instability contributes (with an appropriate weighing factor) to the "instability degree" = ID.

The higher ID, the less presumably stable the antenna. With the marking system and weights that were chosen, ID ranges between 7 (best) and 44 (worst) for all former or current DORIS antennas.

The detailed result of this analysis is presented in the form of an Excel spreadsheet (file "Stability-assessment.xls"), in the Electronic Supplementary Material (ESM) of this paper.

Figure 31 shows the result of such an assessment, for the same network as on figure 16, but using this more detailed and less subjective approach, over the one explained in chapter 7.1.

To explain how this evaluation was carried out, we will go from top to bottom through the different elements which make up an antenna support. The different values for a given criterion can be seen in the pop-up comments fields of the ESM spreadsheet file.

A. Antenna and supporting plate:

- Antenna: none of both antenna types is more stable than the other one. But because the Starce antenna is easier to survey and has better defined phase centres, it is considered better.
- supporting plate: here we assess the plate's material, which is likely or not to corrode and cause an antenna drift (which already happened at several sites).
- Plate assembly: plate assembly that meet the installation specification ensures that the antenna is rigidly fastened to the tower, and that the antenna's verticality can be precisely adjusted. This is the case at almost all sites but a couple, which were given two "instability points" instead of one on this criterion.

B. Primary support: this is the element below the antenna supporting plate and the assembly device. It can be either a concrete pillar, or a metal tower.

B.1. Concrete pillar or metal pipe:

11.5 Internal DORIS co-locations

Following the evolutions of the network dealt with in chapters 6 and 7, there has been more than one antenna location at most DORIS stations (see figure 37 and the "DORIS-occupations.pdf" file in the ESM). In order to ensure both the continuity of the time series, and an optimal contribution of DORIS to the IERS, it is essential that all successive antenna locations be accurately tied together through a geodetic survey. This has been done for most sites where the distance between two successive antenna locations are less than 10 km.

11.6 Co-locations with tide gauges

Like other space geodesy techniques, DORIS can be used to provide an absolute geodetic reference for tide gauges. As of the mid-90's, with the growing interest for the monitoring of the sea level, a geodetic connection was measured between the DORIS antennas and a nearby tide gauge if available. Moreover, the possibility to add more such co-locations was taken into account when planning the evolutions of the network. This concern had some consequences on the design of the current network:

- The Mahe and Crozet station installations were motivated by the possible co-location with a tide gauge, whereas adding a new station in such well-equipped regions was not absolutely necessary, as far as the network density was concerned.
- The replacement of Colombo by Male, and that of Galapagos by Santa Cruz, was partly motivated by the possible co-location with a tide gauge.
- The location of the Sal station, which was a replacement for Dakar following the closure of the host agency at that site, was selected so that the DORIS station would be on the same island – out of 10 or so forming the Cape Verde Republic – as the tide gauge.
- Additional stations were suggested at Bermuda and Fernando de Noronha in the Atlantic Ocean, Pohnpei and Midway in the Pacific Ocean, but eventually abandoned after several years of fruitless attempts to bring these projects to a successful conclusion.
- The current projects for new stations in the Pacific Ocean (Tarawa, Kiritimati, and Adak) are all tide gauge equipped sites.

Inter-antennas, but too much detail for journal

Moreover, measuring a few missing DORIS – tide gauge ties on the occasion of the network renovation allowed to progressively increase the number of such co-locations (figure 38) up to 19 available ties.

out of the scope of this paper

12. PLANNED EVOLUTIONS

12.1 Strengths and weaknesses of the DORIS network

Compared to other space geodesy networks, the DORIS network has the following unique advantages:

- It is much more homogeneous. Whereas the IGS network (Moore and Neilan 2005) has many more stations (about 300), it has a very heterogeneous distribution, with very dense areas over Europe and the USA, and large gaps over the Pacific Ocean, Southern Indian Ocean, and Africa (North of the Equator). The SLR network (Pearlman 2002) and VLBI network (Schlüter et al. 2002) are neither equally distributed.
- It has practically the right number of stations to meet its primary objectives. The PRARE network (Massmann et al. 1997), which initially aimed at achieving the same objectives as DORIS, has 10 stations operating, out of an initially planned network made of 30 or so stations.
- It makes the IERS network denser where needed, by adding points in regions where no other techniques are present.
- Unlike other IERS techniques, it is perfectly divided into the Northern and Southern hemispheres: there are exactly as many stations in both hemispheres, and out of 38 co-located sites, 18 are located in the Southern hemisphere.
- Its centralised management by IGN has allowed to carry out a major renovation effort, leading to an almost standardised equipment layout. All equipment changes are tracked by one group (the DORIS maintenance unit), which allows to detect serial problems and take the necessary corrective actions.

Although they are quite satisfying, the current network density, homogeneity and robustness – i.e. the network's ability to ensure a continuous tracking of the satellites orbits when a given station is down – could still be improved. The map on figure 39, on which the visibility circles of the stations were drawn for the lowest DORIS-equipped satellites (832 km altitude) and for a cut-off elevation angle of 12° , shows a few weak areas:

It was anyone's business to see if the DORIS network is sufficient to properly define TRF components at the level of user needs.

✓

the significant failure rate of the ground equipment. Despite evolutions of the transmitting beacons, many equipment failures, added to long repair times, have been causing several month data interruption at many sites, and shorter but repeated ones at other places. Nevertheless, the recent massive deployment of retrofitted third generation beacons lets us feel the first stirrings of hope for an operation ratio nearing 100 %.

12.2 Evolution plans and proposals

The DORIS stations at Dionysos, Kourou, Toulouse, Socorro and Krasnoyarsk still have to be renovated, and this should hopefully happen in 2006. The last two remaining Alcatel antennas in the network – Dionysos and Toulouse – will then have been replaced with Starec ones.

A new station should be installed at Rikitea (Polynesia), which will eventually replace the one at Rapa. Moreover, new stations are in project at Tarawa and Kiritimati (Republic of Kiribati), Adak (Aleutian Islands), Tamanrasset (Algeria) and Riyadh (Saudi Arabia). Figure 40 shows the location of these planned new stations.

Equipment wise, the deployment of the third generation beacons will continue, until all stations are equipped with this kind of beacons, except a few ones where power supply issues impose the use of less consuming second generation ones.

More IDS experiments will be started when a sufficient number of beacons are available, after proper selection by the IDS Stations Selection Group.

13. CONCLUSION

out of the scope of this paper, see other papers dealing with orbit determination

The quality, density and homogeneity of the DORIS network have been continuously improving throughout its 20 year evolution. With 56 stations equally distributed around the globe, it guarantees an excellent orbit coverage for the DORIS-equipped satellites (usually more than 85 % for the altimetry satellites), thus playing a key role in the success of the DORIS system. Such a density makes the DORIS network an essential contributor

How good are the orbits?

References

✓ Altamimi Z, Sillard P, Boucher C (2002) ITRF2000, a new release of the international terrestrial reference frame for earth science applications, J Geophys Res Solid Earth 107(B10):2214, doi:10.1029/2001JB000561

✓ BIH (1988) Annual report for 1987. Observatoire de Paris.

✓ Boucher C, Fagard H (1991) DORIS stations coordinates. Proc International DORIS orbit computation workshop, Toulouse, Oct.

✓ Boucher C et al. (1994), Proposal to include DORIS as a new technique in IERS. Rapport Technique GRGS n°12.

✓ Boucher C et al. (1996), Results and analysis of the ITRF 94. IERS technical note n° 20.

✓ Boucher C et al. (1999), The 1997 International Terrestrial Reference Frame (ITRF97), IERS Technical Note 27, Observatoire de Paris.

Fagard H, Orsoni A (1998) The DORIS network: review and prospects. Proceedings of the DORIS days, Toulouse, April.

9

Fagard H, Orsoni A (2000) Current status and evolution prospects of the DORIS network.

Proceedings of the DORIS days, Toulouse, May.

Where do I get this?

→ Geodetic Survey Division (1993), Guidelines and specifications for ACP and CBN site selection and monumentation.

→ IDS (2004) Recommendations of the IDS plenary meeting, Paris, May.

✓ Le Bail (submitted) Estimating the noise in space-geodetic positioning. The case of DORIS.

This issue.

Massmann et al. (1997) Impact of PRARE on ERS-2 POD. *Adv Space Res* 19(11):1645-1648

✓ Moore A.W., Neilan R.E. (2005) The International GPS Service tracking network: Enabling diverse studies and projects through international cooperation, *J Geod* 40(4-5): 461-469, DOI 10.1016/j.jog.2005.10.009

✓ Pavlis, E. C., S. P. Mertikas and the GAVDOS Team (2004) The GAVDOS Mean Sea Level and Altimeter Calibration Facility: Results for Jason-1, 3rd Jason special issue, *Mar. Geod.*, (27), 3-4:631-655, DOI:10.1080/01490410490902106

✓ Pearlman MR, Degnan JJ, Bosworth JM (2002), The International Laser Ranging Service. *Adv Space Res* 30(2):135-143

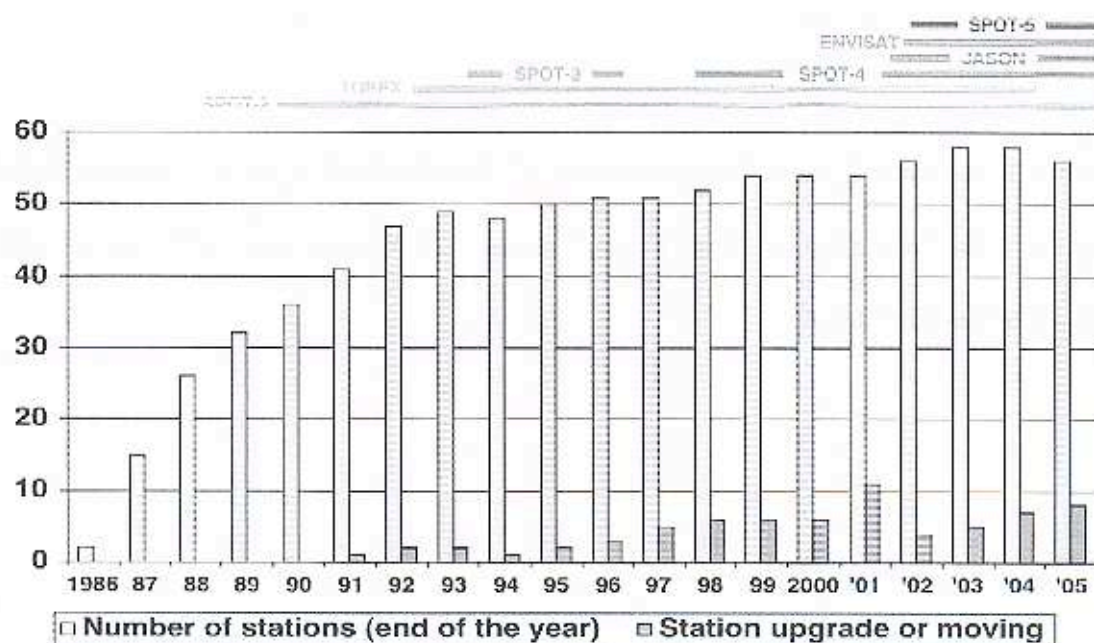


Figure 1: Evolution of the DORIS network



Figure 2: Map of the DORIS network upon SPOT-2 launch (January 1990)

too many figures, — good information, but
too much detail

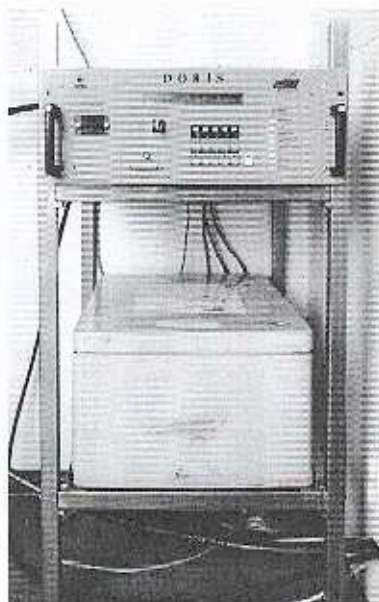


Figure 3:

DORIS beacon 1.0 (top) and Battery case (bottom) in a homemade rack



Figure 4:

DORIS Alcatel antenna (left) on a one-metre tower and side wall mount, DORIS meteorological station on the right.

Capitalization in legends not consistent

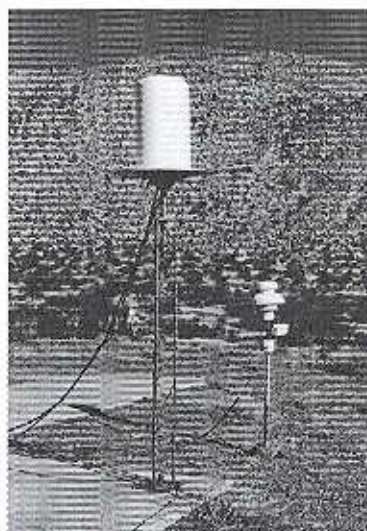


Figure 5:

2 m tower on a concrete pad (Goldstone/GOMA)



Figure 6:

2 m tower on a concrete block (Marion Island/MARA)



Figure 7:

3 m tower on the upper terrace of a building (Galapagos/GALA)

List of all antenna occupations in the permanent DORIS network

Station name	Acronym	Start date	End date	Remarks
AMSTERDAM	AMSA	1987-02-20	1997-04-21	
	AMSB	1997-04-21	2001-03-28	
	AMTB	2001-03-28		
AREQUIPA	AREA	1988-12-16	2001-11-20	
	AREB	2001-11-21		
ARLIT	ARLA	1987-12-05	1992-12-09	
	ARMA	1992-12-11	1999-07-31	Official closure in June 2005 only
ASCENSION	ASDB	1997-02-28		
BADARY	BADA	1991-11-12	2004-08-10	
	BADB	2004-08-11		
BELGRANO	BELB	2004-02-06	2005-02-13	
	BEMB	2005-02-15		
CACHOEIRA PAULISTA	CACB	1992-08-13	2004-04-25	
	CADB	2004-04-25		
CANBERRA-ORRORAL	ORRA	1992-09-15	1996-03-19	
	ORRB	1997-01-12	1998-10-10	Replaced with MOUNT STROMLO
CHATHAM ISLAND	CHAB	1999-02-28		
CIBINONG	CIBB	1992-09-07	2000-12-11	
	CICB	2000-12-12		
COLOMBO	COLA	1991-06-06	2004-10-19	Replaced with M.
CROZET	CROB	2003-12-21		
DAKAR	DAKA	1987-02-28	2001-01-10	Replaced with SAL
DIONYSOS	DIOA	1989-02-15		
DJIBOUTI	DJIA	1987-03-10	2000-07-04	
	DJIB	2000-07-04		
EASTER ISLAND	EASA	1988-11-17	2001-02-23	
	EASB	2001-02-26		
EVEREST	EVEB	1992-05-22		
FAIRBANKS	FAIA	1990-10-10	1999-10-05	
	FAIB	1999-10-08		
FLORES	FLOA	1988-12-19	1993-06-21	Replaced with SANTA MARIA
FUTUNA	FUTB	2000-12-13		
GALAPAGOS	GALA	1991-06-10	2005-08-06	Replaced with SANTA CRUZ
GOLDSTONE	GOLA	1988-01-21	1994-08-03	
	GOMA	1994-08-03	1996-09-16	
	GOMB	1996-09-25	2004-09-11	Replaced with MONUMENT PEAK
GREENBELT	GREB	2000-06-29		
GUAM	GUAB	1993-12-12	2002-04-10	Official closure in June 2005 only
HARTEBEESTHOEK	HBKA	1988-03-10	1997-05-26	
	HBLA	1997-05-30	2000-08-07	
	HBKB	2000-08-10	2005-09-11	
	HBLB	2005-09-12		Same antenna location as HBKB
HUAHINE	HUAA	1989-01-10	1994-08-24	Replaced with PAPEETE
JIUFENG	JIUB	2003-12-10		
KAUAI	KOKA	1990-09-26	2002-11-14	
	KOLB	2002-11-17		
KERGUELEN	KERA	1987-01-28	1994-11-21	
	KERB	1994-11-21	2001-04-01	
	KESB	2001-04-04		
KITAB	KITA	1991-11-20	1996-05-21	
	KITB	1996-05-22	2001-05-24	
	KIUB	2001-05-25		
KOUROU	KRUA	1986-12-06	1992-11-10	
	KRUB	1992-06-25		
KRASNOYARSK	KRAB	1995-10-29		

Send message to a website

No, the ESM is intended for such purpose

Considered element	Criteria	Weight	ADEA	ADEB	AMSA	AMSB	AMTB	AREA	AREB	ARLA	ARMA	ASDB
Antenna and supporting plate												
Antenna		1	2	1	2	1	1	2	1	2	2	1
Supporting plate		1	2	1	2	3	1	2	1	2	2	1
Plate assembly		1	2	1	2	1	1	2	1	2	2	1
Primary support :												
Concrete pillar or metal pipe												
Construction type		2	1		2	2	2		1			2
Ground hardness		1	1		2	2	2		2			2
Height		1	0		0	0	0		0			0
Metal tower												
Tower model		1			2			2		2	2	
Height (Lederc tower)		1										
Height (Normand tower)		3			1			2		2	2	
No guy-wires (Normand tower)		2										
Guying quality (Normand tower)		2			1			2		2	0	
Secondary support :												
Concrete block or pad on the ground												
Construction type		2										
Ground hardness		1										
Building												
General structure		2	5		2			2		4	4	
Primary support location WRT structure		2	2		1			1		1	2	
Height of tower base above ground (m)	0.25	3	3		4			3		4	4	
Whole site												
Geological site stability		1	2	2	2	2	2	3	3	2	2	2
Instability degree (ID) :												
		23	8	22	13	11	28	10	31	29	11	
Measured antenna excentricity (mm)												
					64		9				4	

No, the ESM is intended for such purpose

100 marks - not really useful - web page